

SLOKY®

Mini 0.1 ~ 0.5Nm Torque adapters



Torque control and safety for “ High-Value ” products

Features:


- No- over tighten, when the demand torque is reached, there is a click sound. For continued tightening on the screw, it is no longer to increase the torque on the screw.
- It has a reversible system to use the same screwdriver for tightening and loosening the screw.
- The limit of loosening torque is larger than the tightening torque to protect both tool and the screw from the breaking or damage.

A total solution for applications below:

- Communication Devices • Consumer Electronics
- Drones/UAV • Printed Circuit Boards
- Smart Phones
- Watches

Transform normal screwdriver to torque screwdriver

SLOKY mini torque adapter to fit almost any kind of the 4mm bits and handle with Ø4 mm in the market.

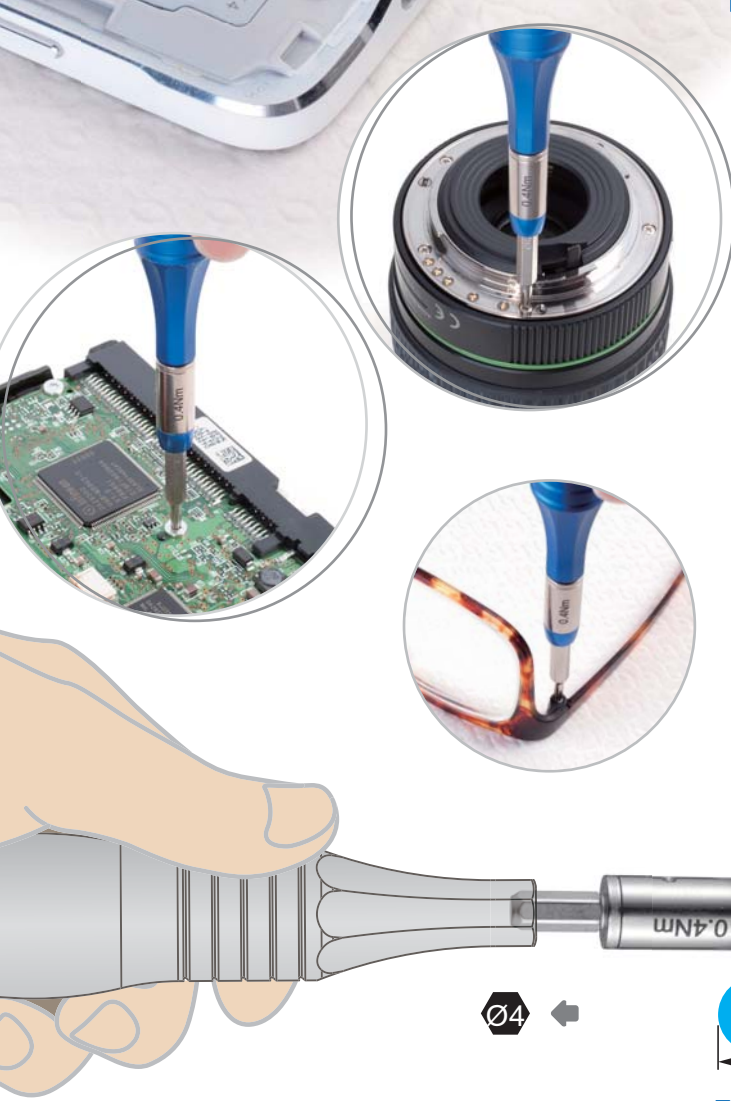

● How to order:

- Mini torque adapter
- 0-TPK-MTA- 0.1 (Nm)
- 0-TPK-MTA- 0.2 (Nm)
- ⋮
- Mini handle
- 0- TPK- H05- B (Blue)

